
INSPEC International Limited
56 Leslie Hough Way
Salford, Greater Manchester
M6 6AJ, United Kingdom

Tel: +44 (0) 16 1737 0699
Email: equipment@inspec-international.com

Area of protection assessment equipment

Description

This equipment is designed for assessment of area of protection in accordance with ISO 18526-3. It comprises a 2mm diameter steel rod and support, together with a square base upon which one of our ISO 18526-4 headforms may be mounted. The rod is held horizontally and may be raised and lowered on the support and then used to 'probe' the area of protection marked on the headform.

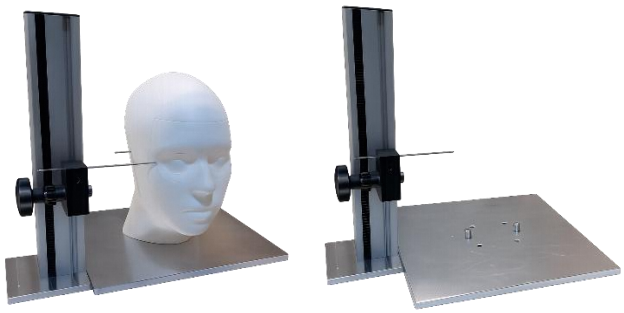

The square base for the headform enables the rod to be held perpendicular to the area being assessed.

The equipment is not supplied with a headform. Appropriate headforms can be quoted for separately.

Services required

Bench mounted

The rig is designed to operate in the conditions specified by the relevant standards listed below.

Storage conditions should be restricted to 5 to 35°C and <85%RH.

Optional items

Headforms:

	Product code
ISO 18526-4 1-S	ITY-3504
ISO 18526-4 1-M	ITY-3407
ISO 18526-4 1-L	ITY-3505
ISO 18526-4 2-S	ITY-3506
ISO 18526-4 2-M	ITY-3507
ISO 18526-4 2-L	ITY-3508

Continued on page 2

Please contact us for a quotation 2AP.2605

Area of protection assessment equipment (continued)

Approximate dimensions

30 x 30 x 30 cm

Relevant standards

ISO 16321-1:2021 clause 7.1

ISO 18526-3:2020 clauses 6.3 and 6.4